

ALPHA[®] WS-698

High Activity Water-Soluble Flux for Semiconductor Applications

DESCRIPTION

ALPHA WS-698 water soluble flux is engineered to be used in the soldering of a variety of lead-free and tin-lead eutectic alloys onto area array packages. The flux is highly compatible with Cu-OSP, electrolytic Ni-Au, and ENIG pad finishes. **ALPHA WS-698** is a halogen-free compliant material with very high fluxing activity for performance advantages in the areas of wetting, spread, and missing ball rate/yield.

Due to **ALPHA WS-698** high fluxing activity it is not recommended to be used as a pre-cleaning flux for cleaning substrates and boards.

READ ENTIRE TECHNICAL DATA SHEET BEFORE USING THIS PRODUCT

FEATURES AND BENEFITS

- Excellent activity allows for excellent soldering to ENIG and Cu OSP soldering process
- Superior wetting maximizing assembly yields to provide highest ball attach and flip chip yield rates
- Excellent material stability whereas the flux maintains tack and viscosity over multiple print cycles (without replenishment up to 8 hours)
- Excellent cleanability performance in that residues are easily cleaned with DI water
- IPC Halogen free formulation

APPLICATION

- Pin Transfer
- Flip Chip / Ball Dip
- Printing

PHYSICAL AND CHEMICAL PROPERTIES

ALPHA WS-698 TECHNICAL DATA		
Category	Results	Procedures/Remarks
Chemical Properties		
Activity Level (J-STD Classification)	ORH0	IPC J-STD-004
Copper Corrosion Test (after washing)	Pass, (No evidence of Corrosion)	IPC J-STD-004
Electrical Properties		
SIR (IPC 7 days @ 85 °C/85% RH) (after washing) (ohms)	Pass, > 1.9 x 10 ¹⁰	IPC-TM-650 method 2.6.3.3 {Pass ≥ 1 x 10 ⁸ ohm min}
Physical Properties		
Appearance	Light Amber, Smooth	ASP-WI-QC-009FS
Tack Strength (Time-0)	~ 140 gF	IRC-SOP-CSP 0011
Viscosity; Malcom Spiral Viscometer (@10 rpm)	~ 250 to 550	GLB-AMG-STM00541
Acid Number	~ 65 to 85	ASP-WI-QC-001FS
pH	~ 3 to 6	IPC-TM-650 pH Meter

REFLOW

Reflow can be accomplished in an air or nitrogen controlled atmosphere. Nitrogen reflow with O₂ levels of 300 ppm and below is preferred and will typically provide significantly improved yield results.


The below table lists general reflow profile parameters. The initial ramp rate should be at 40 to 130 °C per minute to a peak temperature of 230 to 245 °C for SAC lead-free type alloys or 210 to 225 °C for Sn63/Pb37 & Sn62/Pb36/Ag2 lead bearing eutectic alloys. The liquidus temperatures are 183 °C for Sn63Pb37 and 220 °C for SAC305/405 alloys. Cooling rate should 1.0~-6.0 °C/sec to 150 °C (ideal is -3.0~-6.0 °C).

Given the uniform furnace loading and low mass associated with typical BGA/CSP packaging assemblies, a lengthy soak or dwell is usually not required and may negatively impact yield


rates. Pb free bearing alloys typically employ a slower ramp rate than that used for tin lead eutectic solder alloy reflow processing.

Reflow Parameters	Sn/Pb Eutectic	Pb Free
Ramp Rate (°C/Sec)	1.0 to 2.0	1.0 to 3.0
Pre-heat 30 to 150 °C (sec)	not applicable	90 to 130
Soak Time 150 to 200 °C (sec)	not applicable	70 to 120
Time Above Liquidus (sec)	30 to 60	50 to 70
Typical Peak Temp Range (°C)	210 to 225	240 to 250
Cool Down Rate (°C/sec)	> 3.0	-1.0~-6.0 (Ideal -3.0~-6.0)

Example reflow profiles:

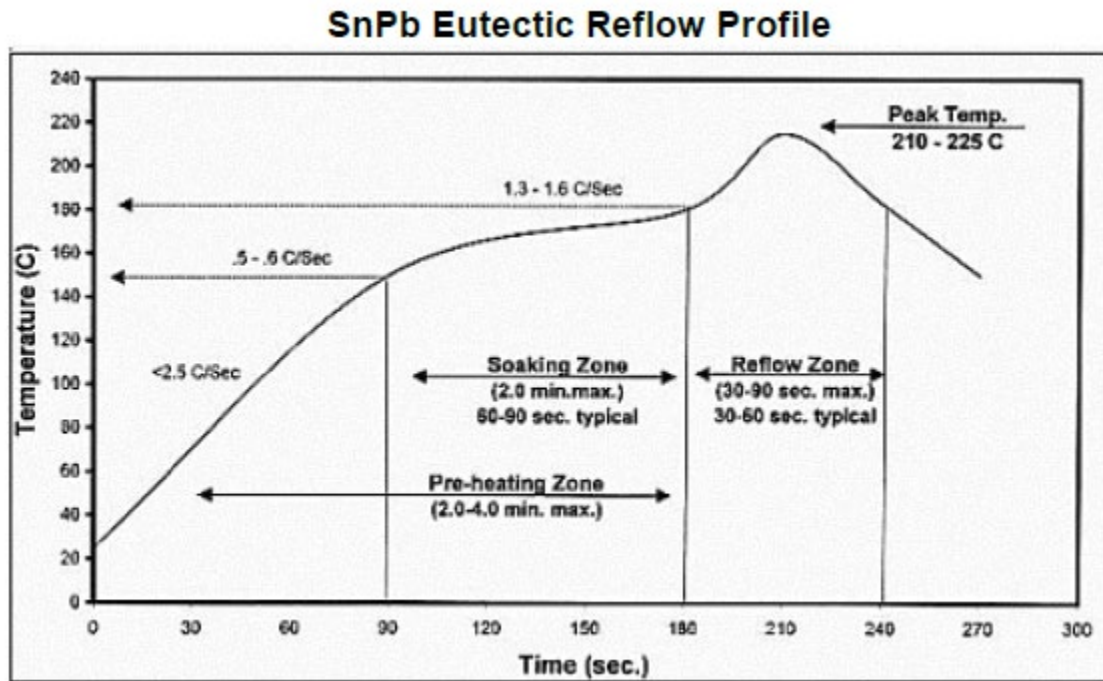

SAC Reflow Profile Reference

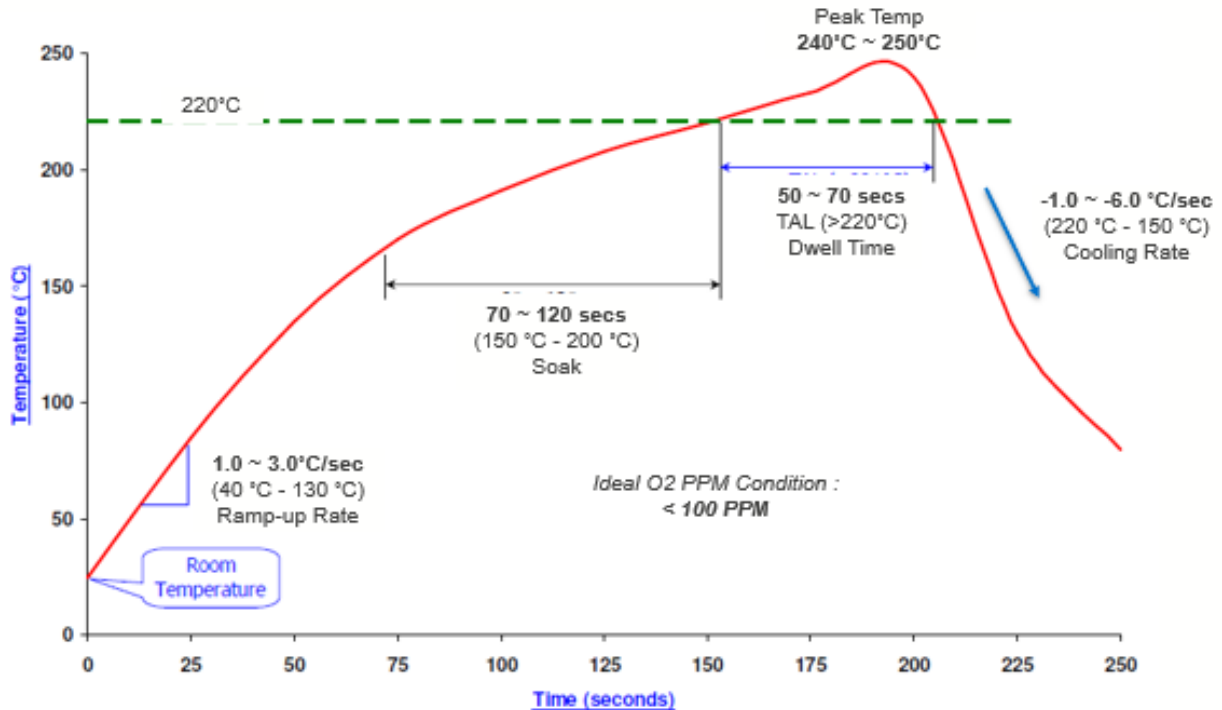

Note: This is just an illustration and reference. Graph not strictly to scale

RESIDUE REMOVAL

For Ballattach Process:

Cleaning using hot deionized water at temperatures of 55 to 60 °C with spray pressures of 35 to 60 PSI are sufficient to remove all residues and achieve good flux residue cleanliness. The use of a saponifier or semi-aqueous cleaning chemistries will achieve excellent cleanliness results for extremely fine pitch high densely populated BGA.

For Flip chip Process:

Cleaning using hot deionized water at temperatures of 55 to 60 °C with spray pressures of 50 to 60 PSI are sufficient to remove residues on standard smaller flip chip devices. The use of a saponifier or semi-aqueous cleaning chemistries will achieve excellent results for extremely low stand-off devices or large densely flip chip devices.

STORAGE

This flux should be stored in sealed containers at 15 to 25 °C. The shelf-life ALPHA WS-698 in sealed container is expected to be 6 months. If a container has been chilled, the container should be allowed to reach room temperature before opening in order to prevent moisture condensation from ambient air onto the flux.

SAFETY & WARNING

It is recommended that the company/operator read and review the Safety Data Sheets for the appropriate health and safety warnings before use. **Safety Data Sheets are available.**

WASTE TREATMENT

Prior to using any recommendations or suggestions for waste treatment, the user is required to know the appropriate local/state/federal regulations for on-site or off-site treatment which may require permits. If there is any conflict regarding our recommendations, local/state/federal regulations take precedent.

CONTACT INFORMATION

www.macdermidalpha.com

North America 140 Centennial Avenue Piscataway, NJ 08854 1.800.367.5460	Europe Unit 2, Genesis Business Park Albert Drive Woking, Surrey, GU21 5RW, UK 44.01483.758400	Asia 14 Joo Koon Crescent, Singapore 629014 65.6430.0700
---	---	--

Also read carefully warning and safety information on the Safety Data Sheet. This data sheet contains technical information required for safe and economical operation of this product. READ IT THOROUGHLY PRIOR TO PRODUCT USE. Emergency safety directory assistance: US 1 202 464 2554, Europe + 44 1235 239 670, Asia + 65 3158 1074, Brazil 0800 707 7022 and 0800 172 020, Mexico 01800 002 1400 and (55) 5559 1588

DISCLAIMER: All statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed. No statement or recommendation shall constitute a representation unless set forth in an agreement signed by officers of seller and manufacturer. NO WARRANTY OF MERCHANTABILITY, WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY IS MADE. The following warranty is made in lieu of such warranties and all other warranties, express, implied, or statutory. Products are warranted to be free from defects in material and workmanship at the time sold. The sole obligation of seller and manufacturer under this warranty shall be to replace any noncompliant product at the time sold. Under no circumstances shall manufacturer or seller be liable for any loss, damage or expense, direct, indirect, incidental or consequential, arising out of the inability to use the product. Notwithstanding the foregoing, if products are supplied in response to a customer request that specifies operating parameters beyond those stated above, or if products are used under conditions exceeding said parameters, the customer by acceptance or use thereof assumes all risk of product failure and of all direct, indirect, incidental and consequential damages that may result from use of the products under such conditions, and agrees to exonerate, indemnify, defend and hold harmless MacDermid, Incorporated and its affiliates therefrom. No suggestion for product use nor anything contained herein shall be construed as a recommendation to use any product in a manner that infringes any patent or other intellectual property rights, and seller and manufacturer assume no responsibility or liability for any such infringement.

© 2019 MacDermid, Inc. and its group of companies. All rights reserved. "(R)" and "TM" are registered trademarks or trademarks of MacDermid, Inc. and its group of companies in the United States and/or other countries.